

NOTES:

1. ITEMS 1 & 2 COLOR: PANTONE BLACK 3,U,2,X
2. ITEM 2 MAXIMUM JACKET DIAMETER: 0.150" ±0.010
3. ALL 4 WIRES FROM P1 TO P2
4. ALTERNATE PARTS REQUIRE ITAC APPROVAL
5. DO NOT TRIM CABLE JACKET
6. DIMENSIONS ARE IN INCHES, []=METRIC
7. ALL MATERIALS MUST COMPLY WITH ROHS, DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT

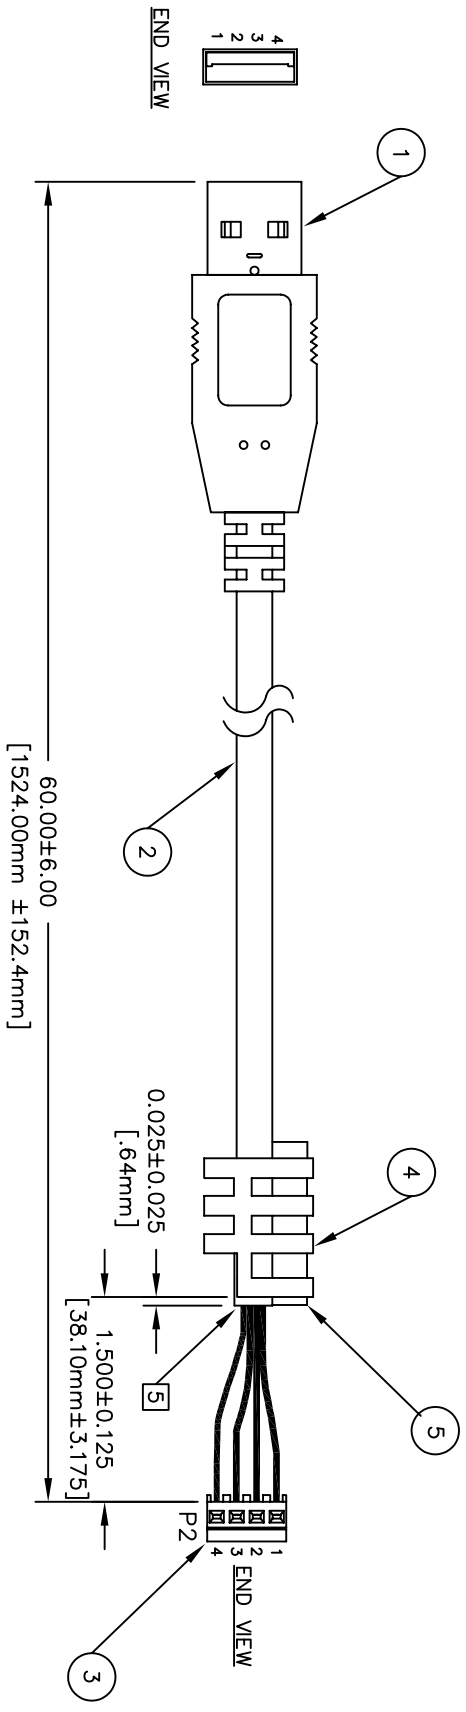


TABLE 1

WIRE LIST		
P1	P2	DESIGNATION
1	1	+5V, PC1
2	2	-DATA, PC3
3	3	+DATA, PC2
4	4	GROUND, PC1

7	.	.
6	.	.
5	AR	RUBBER SPLINE, 0.150 DIA.
4	1	STRAIN RELIEF PER ITAC #10-1000773
3	1	HOUSING, .1" CENTERS, (AMP 640442-4 OR EQUIV.)
2	60"REF	CABLE, STRANDED, UL/CSA 2C/28AWG & 2C/26AWG 100% SHIELDED
1	1	CONNECTOR USB TYPE A PER USB 1.0 SPEC
ITEM	QTY	DESCRIPTION

SIGNATURE		DATE	TITLE	
DFT			CABLE ASSEMBLY	
EGR			PANEL MOUNT USB	
MFG			P/N: M-00358-XROHS-0000WO	
QA			SIZE	DWG NO
RLSE			A	11-1001934
			SCALE: NONE	SHEET 1 OF 1
				REV A

ITAC SYSTEMS, INC.
GARLAND, TEXAS
©2006 ITAC SYSTEMS, INC.